Thule Lift V16

INFO

Thule Lift V16 - Manual
- 2 bikes, extendable to 3
- Weight   17 kg
- Max. loading weight   50 kg
- Max. bike weight   30 kg
- Rail distance   15 cm
- For vertical walls between 70-95 cm
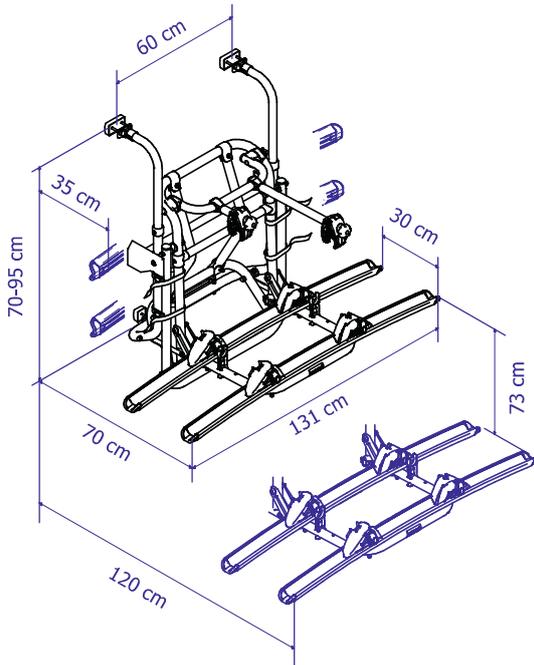- Suitable for e-bikes

Thule Lift V16 - Motor 12V
- 2 bikes, extendable to 3
- Weight   18.1 kg
- Max. loading weight   50 kg
- Max. bike weight   30 kg
- Rail distance   15 cm
- For vertical walls between 70-95 cm
- Suitable for e-bikes

FEATURES
- 2 versions available: with hand crank or with 12V motor
- Recommended for vertical motorhomes or caravan walls
- The motor enables you to lower the platform in only 40 seconds
- The hand crank allows you to lower the platform manually
- The platform can bridge a distance of 70 cm in height
- The lowest position of the platform allows you to easily load and unload the bikes
- Easy mounting of bikes through detachable bike holders with lockable Thule AcuTight torque limiter knobs that click when optimal torque is reached
- Adjustable wheel holders with straps featuring a pump buckle tensioning system to easily secure the bike wheels
- The platform lock creates excellent dynamic force control and perfectly secures the bikes during transport
- The platform is locked manually and can easily be clicked in the upward position when not being used
- The lifting frame is nice and tight during the ride thanks to the integrated safety straps

THULE® SWEDEN

ELONGATION KIT

	Thule Lift V16 Elongation Kit
	Set of 2 longer arms - makes it possible to extend the mounting range of the Thule Lift V16 bike rack up to 95-150 cm See 'Bike Rack Accessories'

EXTENSION KIT

	Thule Lift V16 3rd Rail Kit
	Rail + bike holder See 'Bike Rack Accessories'

ACCESSORIES

- Thule Fatbike Rail
- Thule Strap Lock
- Thule Rear Warning Sign

- Thule Brake Straps
- Thule Bike Frame Adapter

307368	Thule Lift V16 - Manual
307369	Thule Lift V16 - Motor 12V
307370	Thule Lift V16 3rd Rail Kit
307371	Thule Lift V16 Elongation Kit 95-150 cm

User
instructions